


# Direct Box (DI) Usage

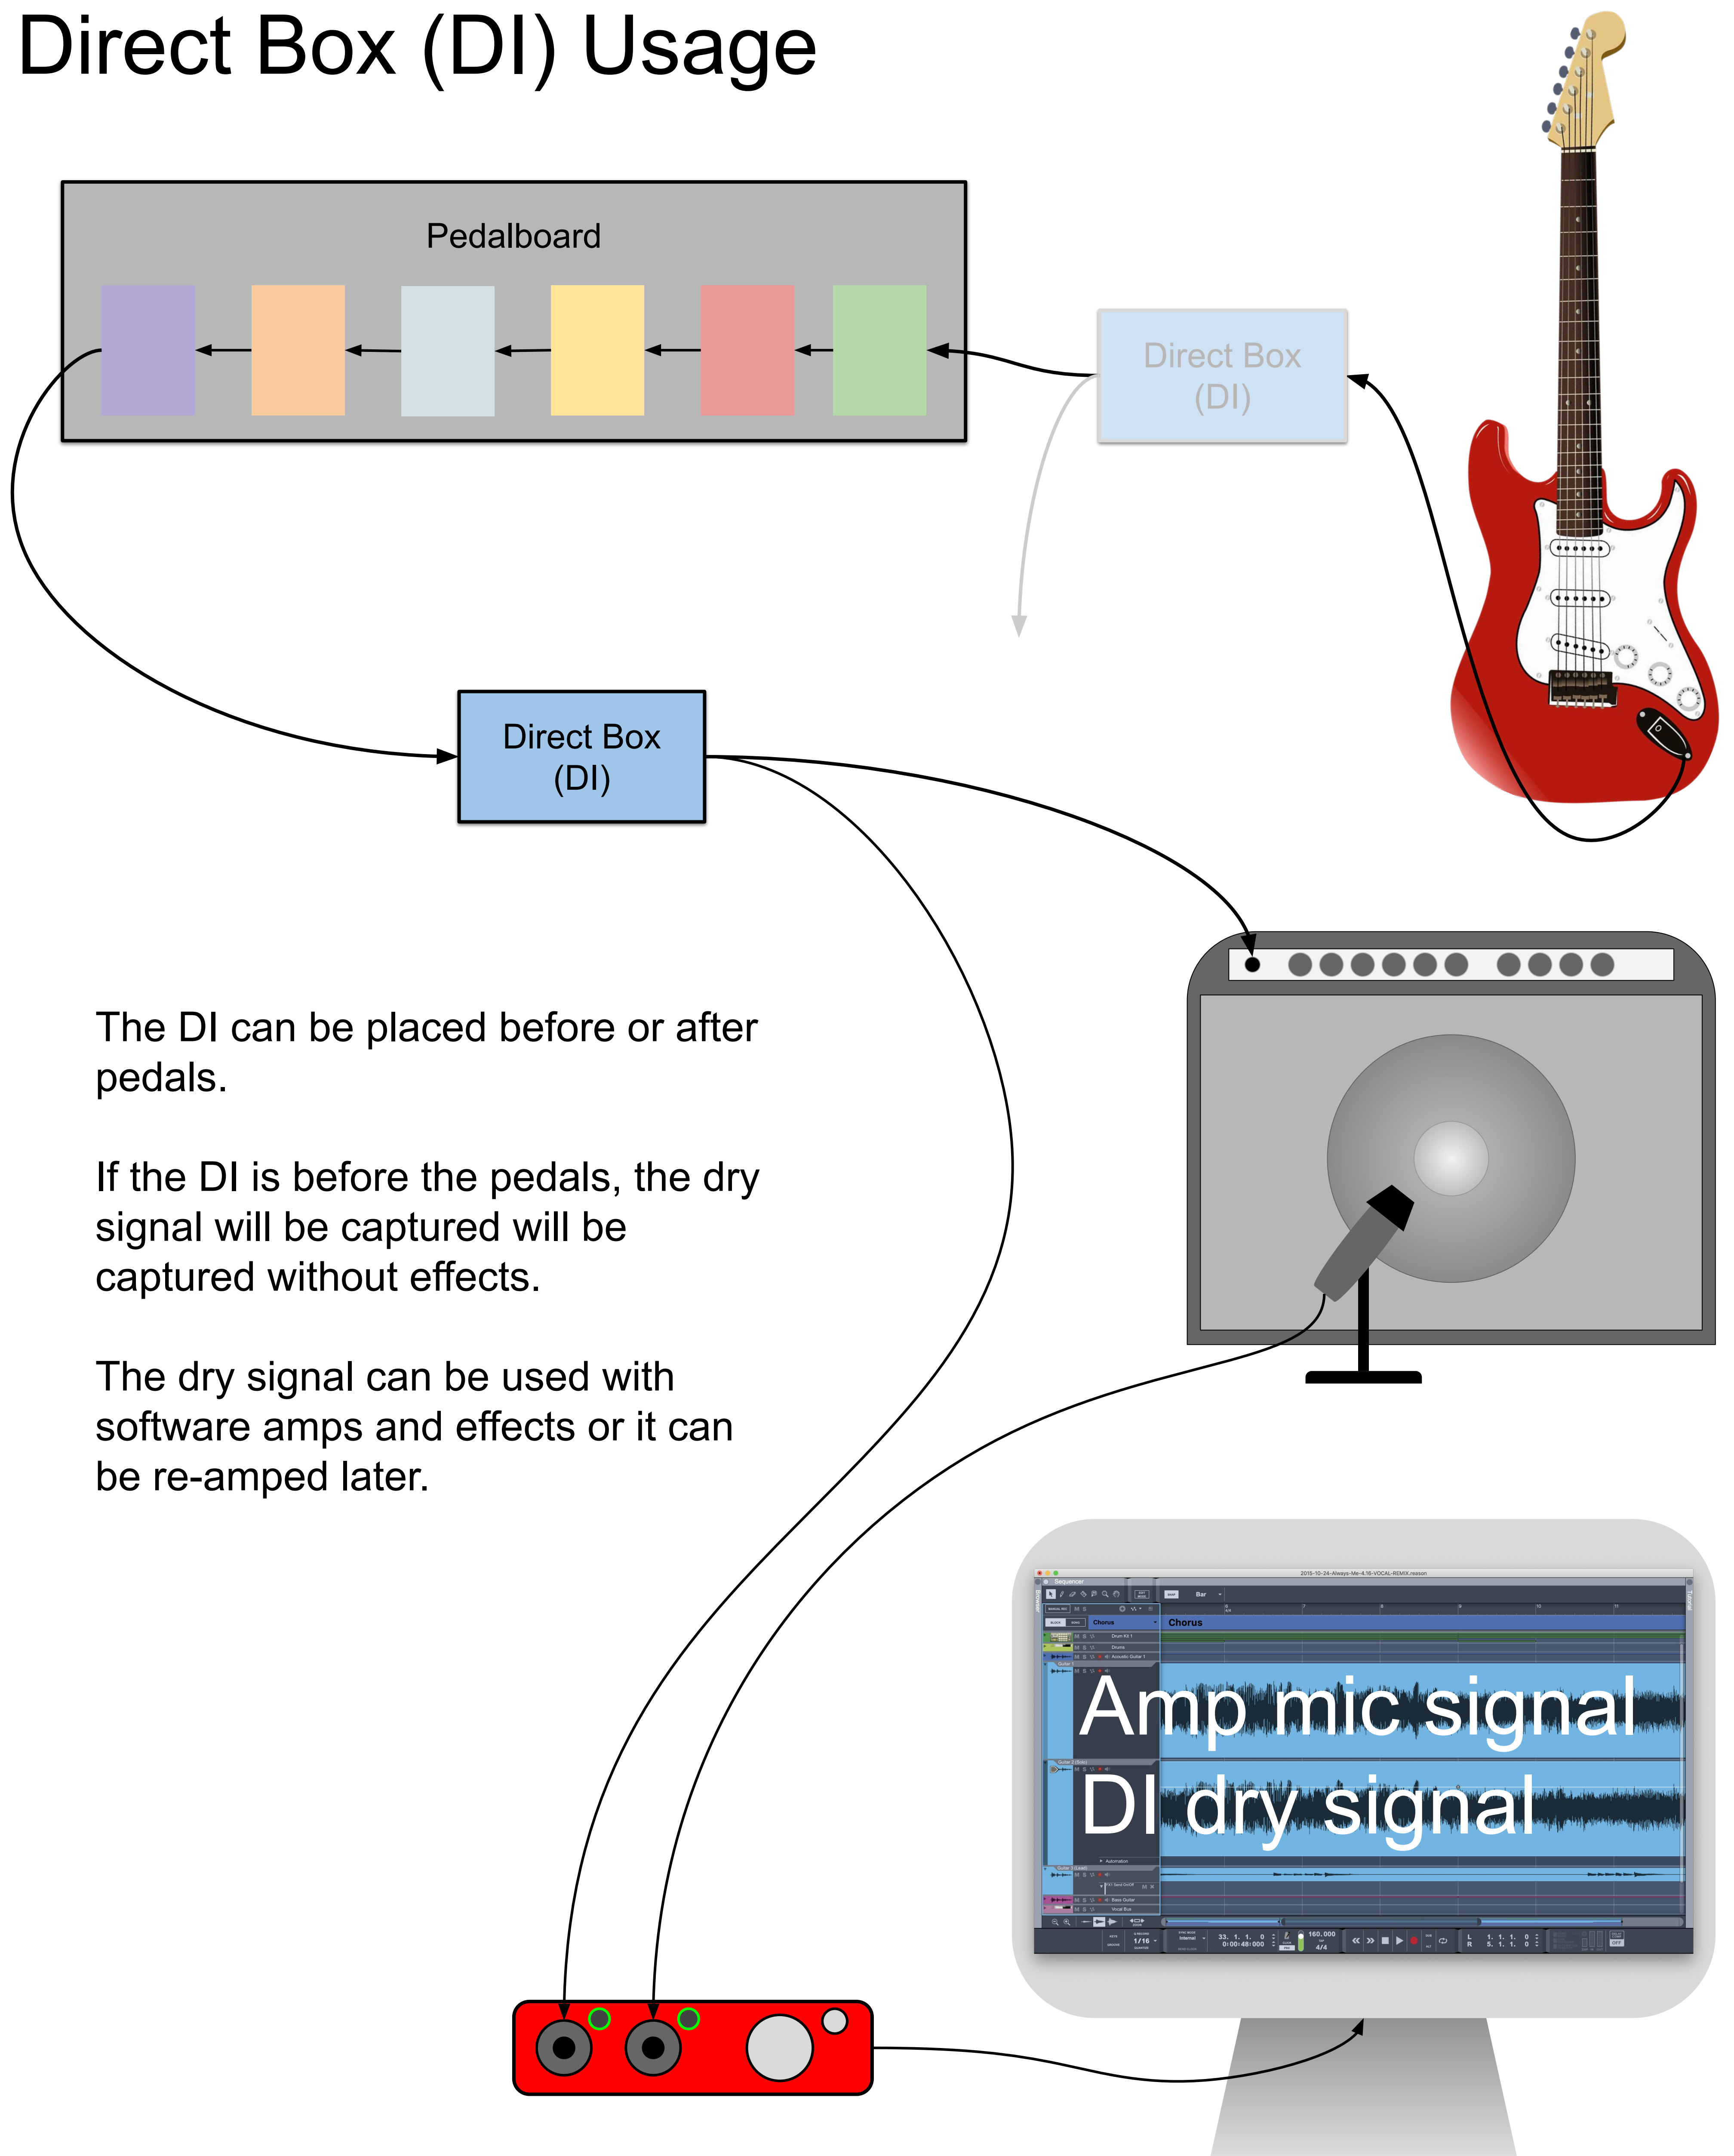

The DI can be placed before or after pedals.

If the DI is before the pedals, the dry signal will be captured without effects.

The dry signal can be used with software amps and effects or it can be re-amped later.